



INSTALLATION INSTRUCTIONS

Accessory
HARD LUGGAGE CARRIER

Application
ALL APPLICABLE MODELS

Publications No.
VERSION 1
Issue Date
NOV 2017

Put this information in the glove box for future reference.

PARTS LIST


Hard Luggage Carrier (Long) Kit
P/N 08L20-E09-200A
Hard Luggage Carrier (Short) Kit
P/N 08L20-E09-200B

*: The part differs depending on the kits.


*Hard luggage carrier (Long)
(P/N 08L20-E09-200A)




*Hard luggage carrier (Short)
(P/N 08L20-E09-200B)




4 Brackets A

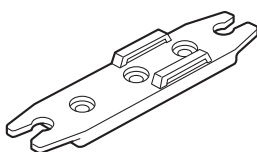

4 Brackets B



4 Plates



8 Thumbwheels



8 Bolts



8 Washers




2 Straps




2 Keys



4 Large pads



4 Small pads




SUPPLIES REQUIRED

Isopropyl alcohol

Shop towel

Tape measure

Illustration of the Hard Luggage Carrier on the Vehicle

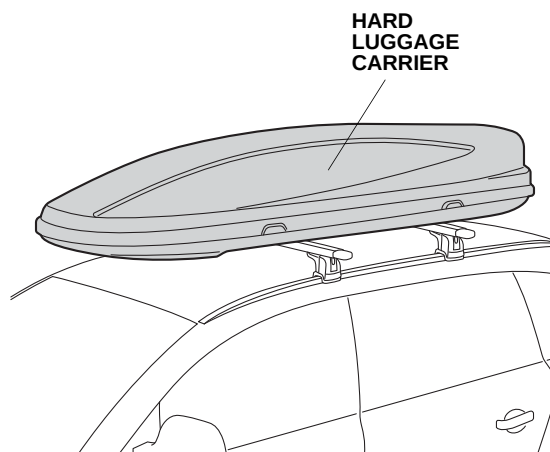

QG13101AC


INSTALLATION

NOTE:

- To use this kit, make sure the distance between the crossbars is 800 mm (31.50 in.).
- This hard luggage carrier kit is designed to be used exclusively with the Acura crossbars, which are sold separately.
- Do not allow the combined weight of the hard luggage carrier and luggage to exceed the carrying capacity of the crossbars.
- Install the hard luggage carrier after installing the crossbars on the roof.
- Be extremely careful not to damage the roof and other finished surfaces of the body when installing the hard luggage carrier.


Installing the Hard Luggage Carrier

1. Using isopropyl alcohol on a shop towel, clean the four brackets B where the four small pads will attach. Remove the adhesive backings from the small pads, and attach them to the brackets B.

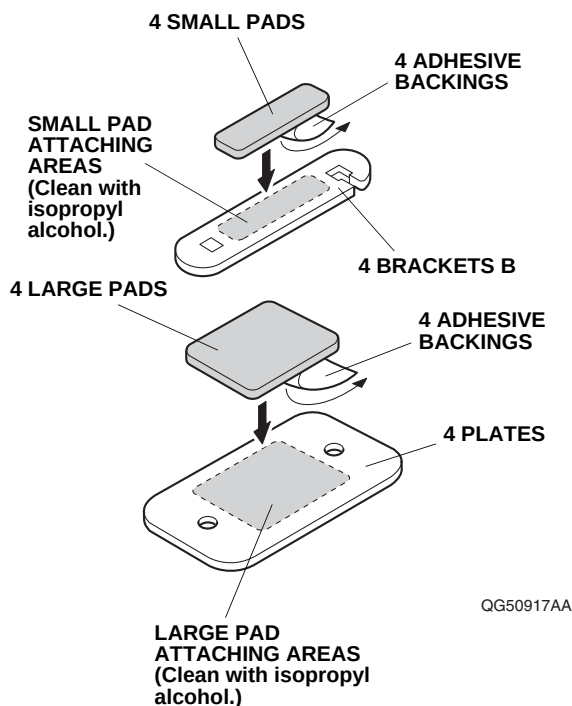


2. Using isopropyl alcohol on a shop towel, clean the four plates where the four large pads will attach. Remove the adhesive backings from the large pads, and attach them to the plates.

3. Under the hard luggage carrier, insert the two bolts through bracket B, the plate and the two holes in the bottom of the hard luggage carrier.

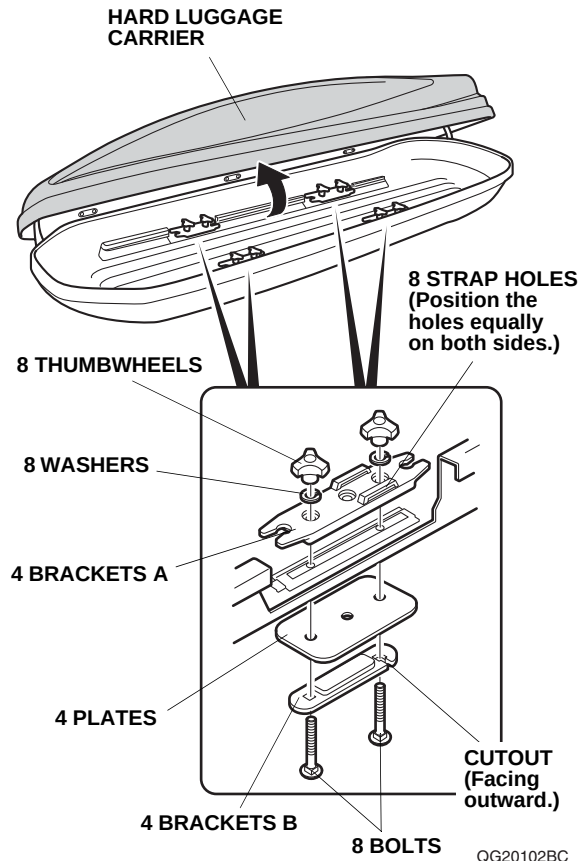

4. Fit bracket A over the threads of the two bolts where they protrude through the hard luggage carrier. Install the two washers over the threads, and loosely install the two thumbwheels. Repeat for the remaining mounting points.
 - Adjust the four brackets A so that the right and left strap holes are positioned equally on both sides.
 - Install the four brackets B with the cutout facing outward.


5. With the help of an assistant, carefully place the hard luggage carrier on the crossbars.
- NOTE: Do not damage the vehicle with the hardware hanging from the bottom of the carrier.

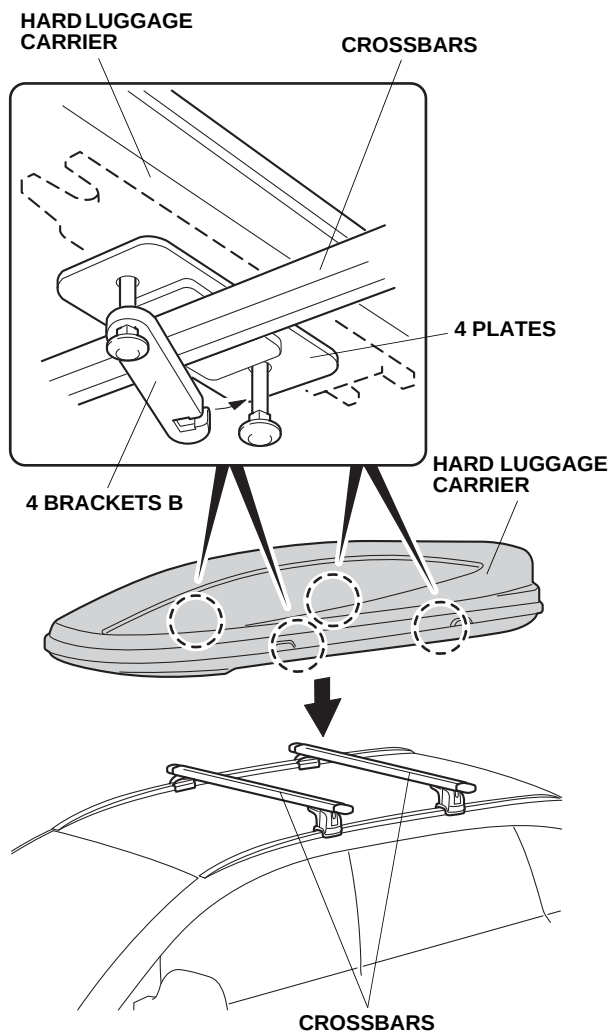

6. Line up the plates on the hard luggage carrier with the crossbars. Swing the slotted end of bracket B around the bolt, and use the thumbwheels to loosely secure the brackets B to the crossbars.

7. Open the tailgate and slide the hard luggage carrier as rearward as possible. Make sure that the hard luggage carrier is not interfering with the tailgate. Then, tighten the four brackets B with the thumbwheels.


NOTE: The hard luggage carrier should be centered on the crossbars and parallel to the direction of travel.

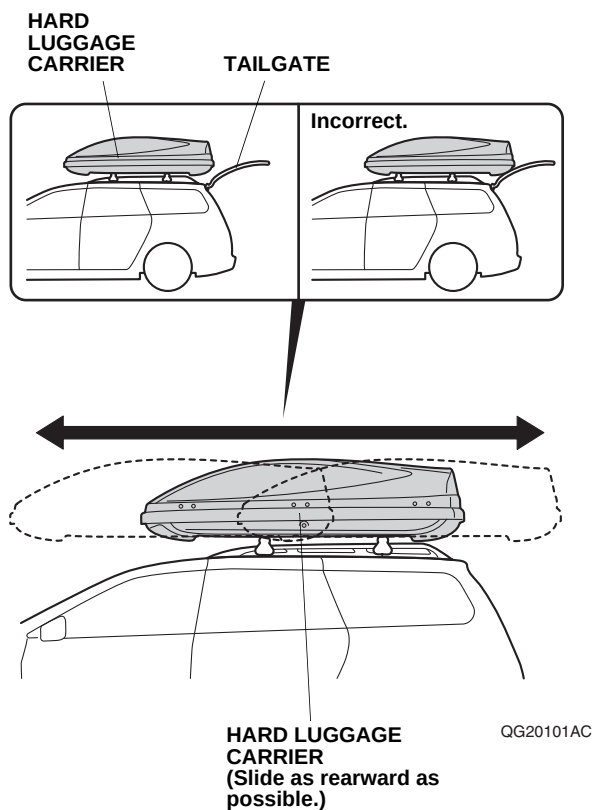

8. Insert the two straps through the strap holes on the four brackets A, and attach the straps together.

⚠ WARNING


- If luggage is not properly secured, it may slide out of the hard luggage carrier.

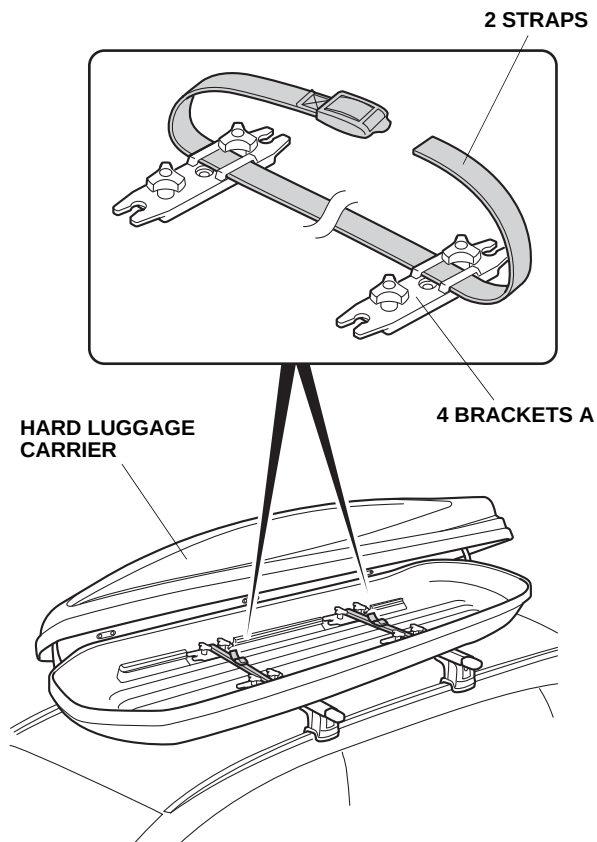

QG20104BC

How to Load Luggage in the Hard Luggage Carrier

9. When placing luggage into the hard luggage carrier, make sure to distribute the weight evenly.

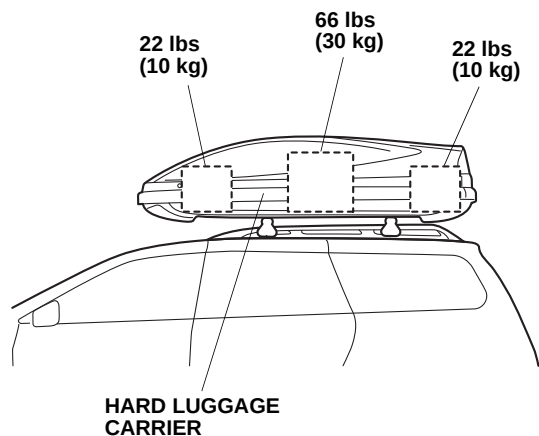

QG20103AC

USE AND CARE

- The weight of the luggage must not exceed the maximum weight capacity of 110 lbs (50 kg). Do not allow the combined weight of the hard luggage carrier and luggage to exceed the carrying capacity of the crossbars.
- Make sure that all the luggage is evenly distributed throughout the hard luggage carrier and firmly strapped into place by the tie down straps.
- The hard luggage carrier and brackets should be periodically checked for damage.
- For cleaning, only use water and a mild detergent.
- Periodically check the thumbwheels for tightness.

PRECAUTIONS

- Avoid sudden starts or stops with the hard luggage carrier on the vehicle. It may cause the bolts and other fasteners to loosen.
- Obey local laws and regulations.
- Before driving, check that the hard luggage carrier is firmly attached and that all luggage is securely strapped down.
- This product is designed to be used exclusively on Acura vehicles. Acura is not responsible if the product is used for anything other than its intended purpose.
- Do not go through an automatic car wash with the hard luggage carrier installed.