


Tailgate - Outer Side Area

How to use this manual.


1

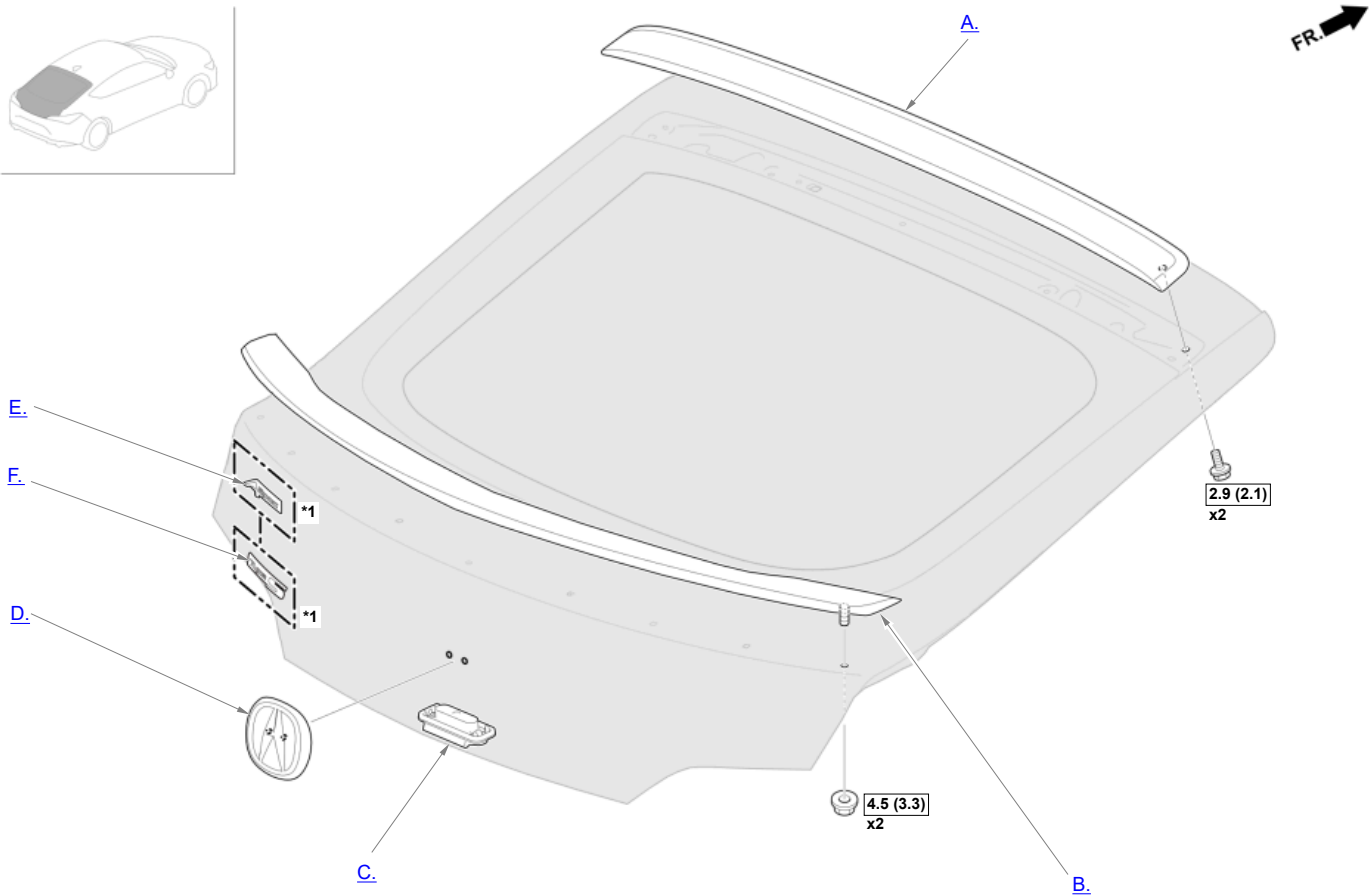

 : Torque, N·m (lbf·ft)	 : Replace	 : Warning/Caution	 : Inspection/Adjustment	★: Learning	■: SPL Tool	 : Required Removal
---	--	--	--	-------------	-------------	--

*1: For some models

2

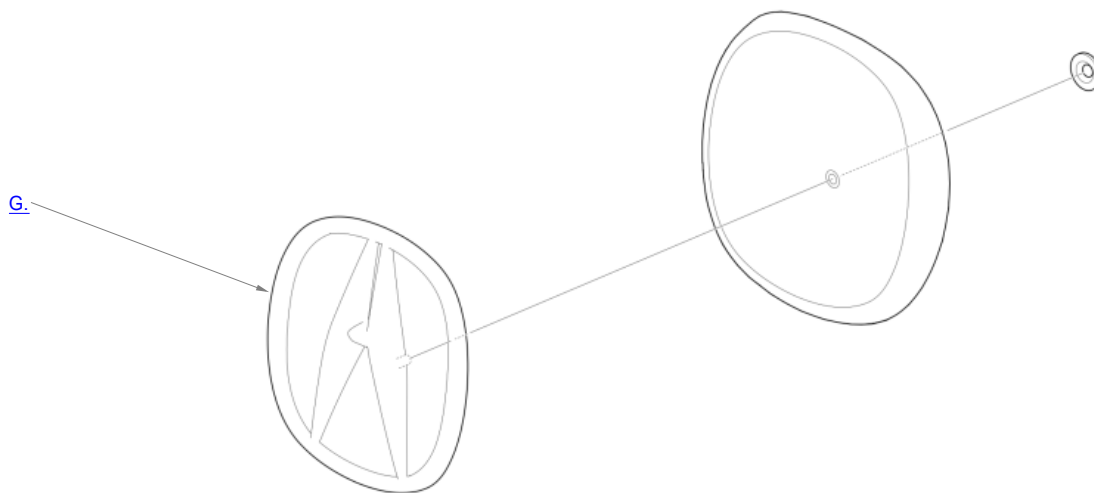

<div><div></div></div> : Torque, N·m (lbf·ft)	<div><div></div></div> : Replace	<div><div></div></div> : Warning/Caution	<div><div></div></div> : Inspection/Adjustment	<div><div></div></div> : ★: Learning	<div><div></div></div> : ■: SPL Tool	<div><div></div></div> : Required Removal
--	-------------------------------------	---	---	---	---	---

A. -

■ Key Information

Do the following before starting your work.


Remove:

- Tailgate Upper Trim

■ Sub-Procedure

● Removal

- Refer to the figure.

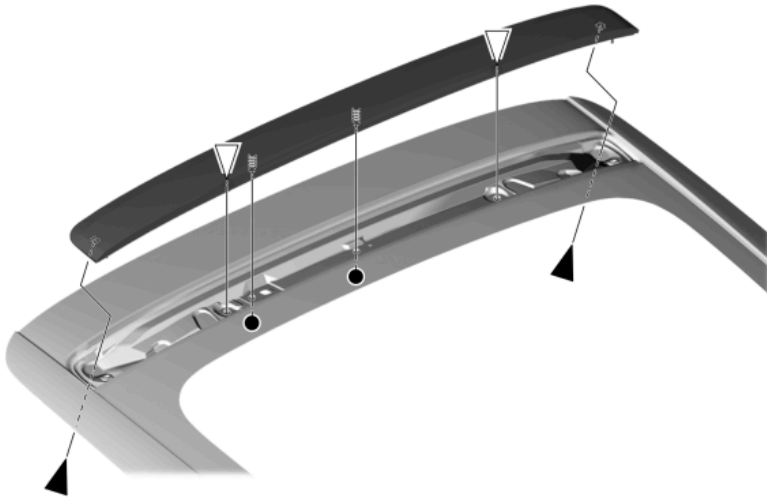

B. -

■ Key Information

Do the following before starting your work.

Remove:



- Tailgate Lower Trim Panel

■ Sub-Procedure

● Removal

- Refer to figure 1.

Figure 1

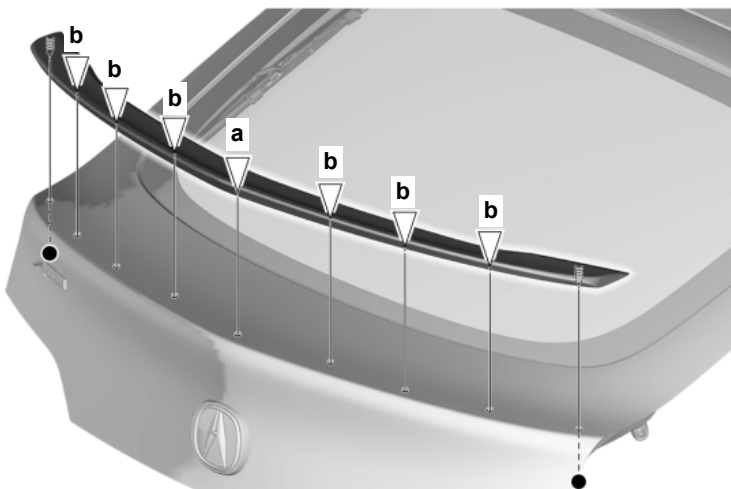


● Installation

- Refer to figure 2.
- NOTE: If you are reusing the original tailgate spoiler, apply primer to the areas where new double-sided adhesive tapes (c) will be applied, then attach the new double-sided adhesive tapes to the trim as shown.

Specifications (Figure 2)

Standard Value	
d	1.6 mm (0.063 in)
e	0.8 mm (0.031 in)

Figure 2

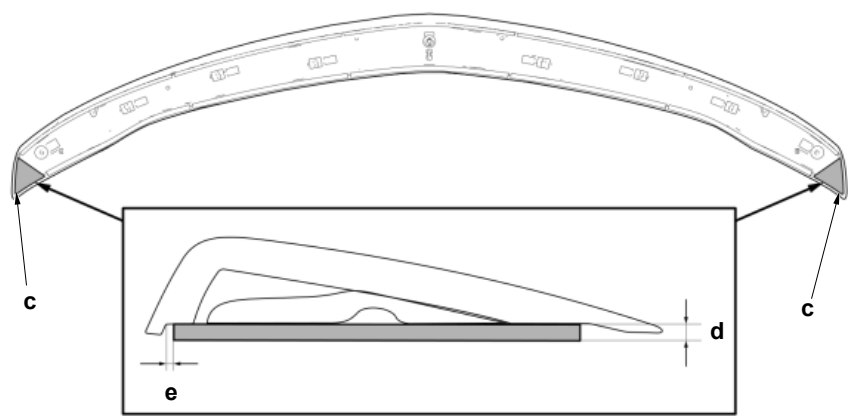

C. -

■ Key Information

Do the following before starting your work.


Remove:

- Tailgate Lower Trim Panel

■ Sub-Procedure

● Removal

- Refer to the figure.

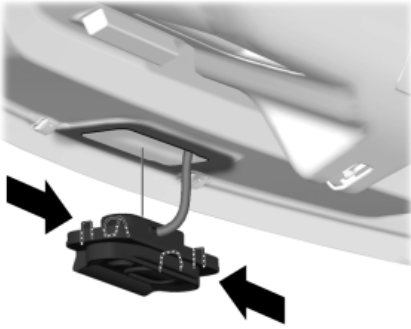

D. -

■ Sub-Procedure


● Installation

NOTICE

After cleaning, keep oil, grease, and water from getting on the surface.

Adhesive Tape Specifications

Standard Value	
a	0.4 mm (0.016 in)

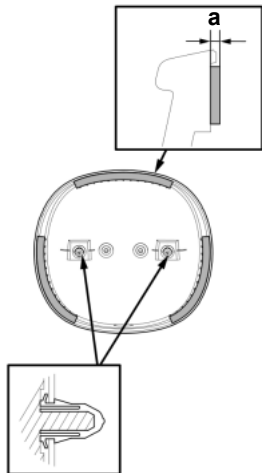

E. -

■ Sub-Procedure

● Installation

NOTICE


After cleaning, keep oil, grease, and water from getting on the surface.

Adhesive Tape Specifications

Standard Value	
a	0.4 mm (0.016 in)

Specifications

Standard Value	
b	77.3 mm (3.04 in)
c	46.2 mm (1.82 in)
d	27.4 mm (1.08 in)

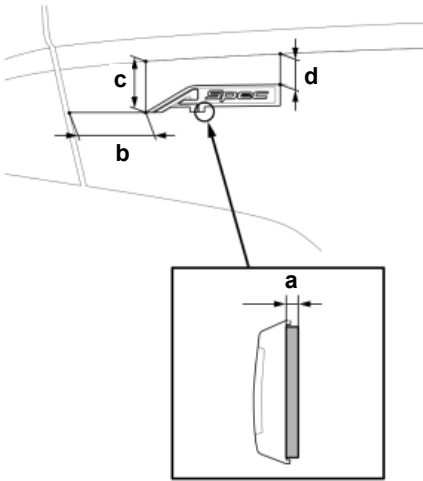

F. -

■ Sub-Procedure

● Installation

NOTICE


After cleaning, keep oil, grease, and water from getting on the surface.

Adhesive Tape Specifications

Standard Value	
a	0.4 mm (0.016 in)

Specifications

Standard Value	
b	88.9 mm (3.50 in)
c	22 mm (0.87 in)
d	26.4 mm (1.04 in)

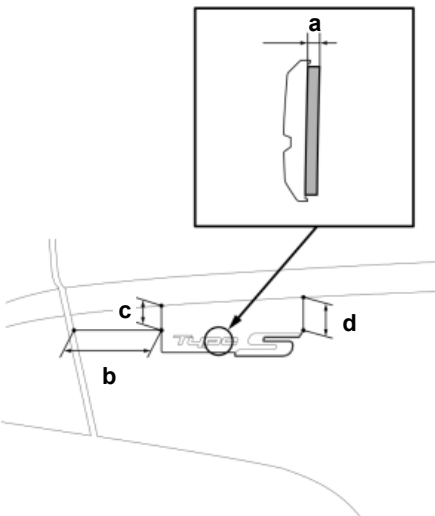

G. -

■ Sub-Procedure


● Installation

NOTICE


After cleaning, keep oil, grease, and water from getting on the surface.

Adhesive Tape Specifications

Standard Value	
a	0.4 mm (0.016 in)

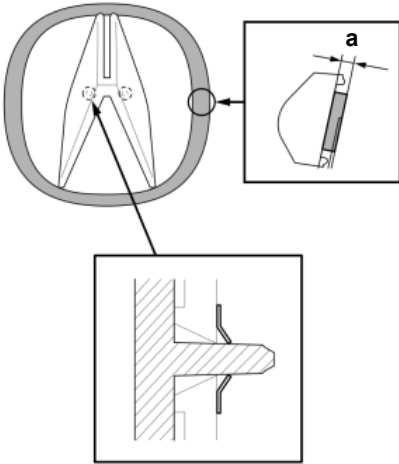


1

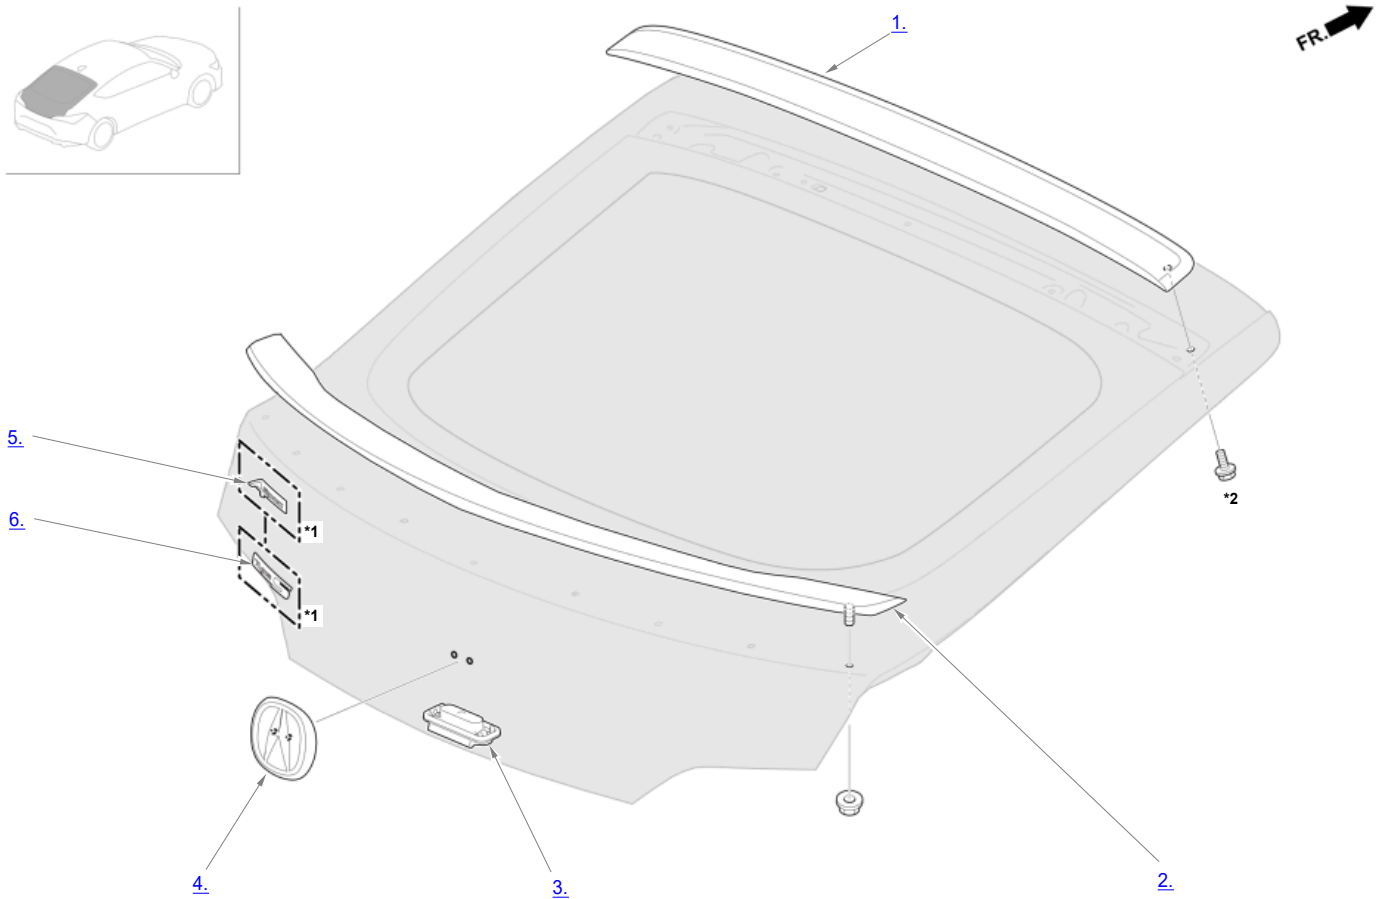

*1: For some models

2

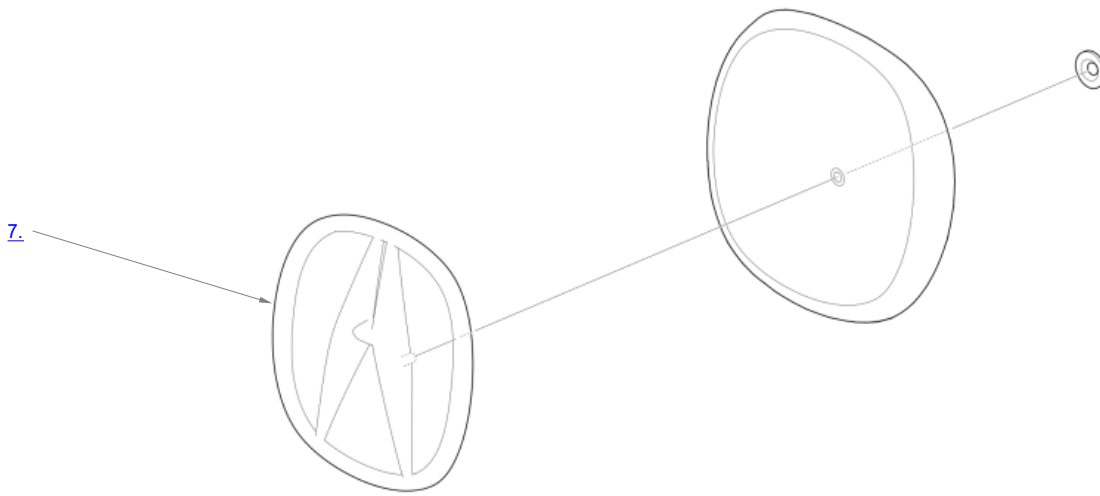

1. High Mount Brake Light

2. Tailgate Spoiler

3. Tailgate **Lock Switch**/Tailgate Outer Handle Switch

4. Rear "A" Emblem Assembly

5. Rear A-SPEC Emblem

6. Rear Type-S Emblem

7. Rear "A" Emblem