

# INSTALLATION INSTRUCTIONS

Accessory

SPLASH GUARDS

Application

2024 INTEGRA TYPE S  
MODEL SERIES


Publications No.

VERSION 1

Issue Date

JUN 2023

## GENERAL VIEW

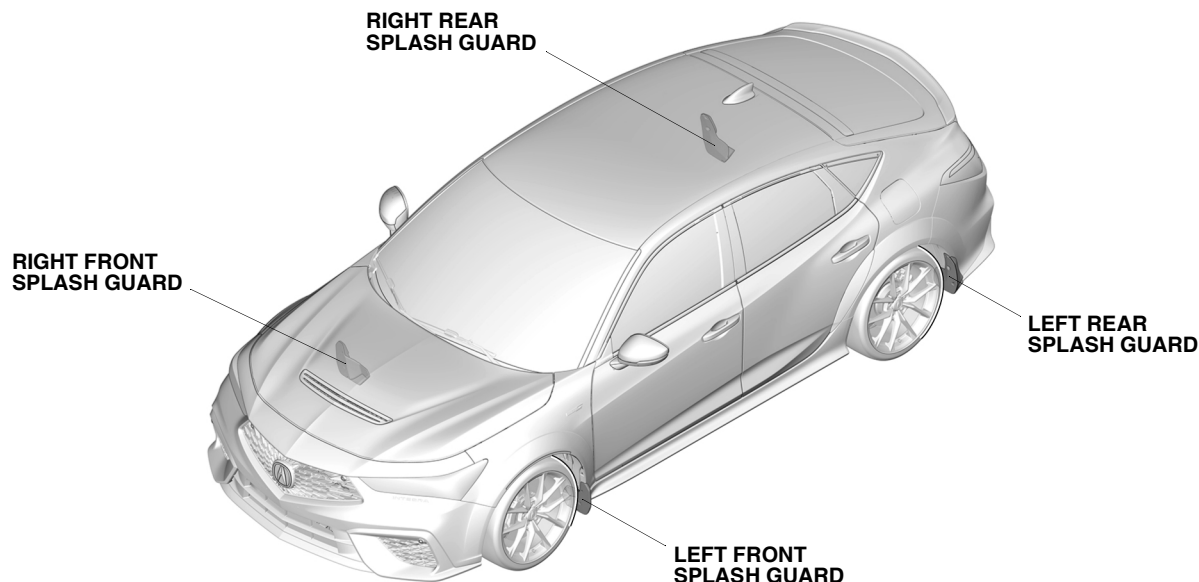

QM80101AU

## FOR YOUR SAFETY (Read carefully.)

### Warning Symbols

**Safety:** Your safety, and the safety of others, is important. To help you make informed decisions about service procedures, we have provided safety messages where appropriate. Of course, it is not practical or possible to warn you about all the hazards associated with servicing a vehicle - you must use your own good judgment.

You will find important safety messages preceded by one of the following symbols:

\*All symbols are not used in all installation instructions.

**⚠ DANGER**

You will be killed or seriously hurt if you do not follow the instructions.

**⚠ WARNING**

You can be killed or seriously hurt if you do not follow the instructions.

**⚠ CAUTION**

You can be hurt if you do not follow the instructions.

**NOTICE**

Gives advice to prevent damage to the product, vehicle, the environment or other property.

**NOTE**

Gives helpful information or instructions to be followed when installing this product.




Indicates a prohibited action.


## Procedure and Location Icons

These icons indicate the work location and the worker's point of view.

\*All icons are not used in all installation instructions.



The location on the vehicle.



The location in the vehicle.  
(Instrument panel.)



Wear eye protection.



Wear heavy gloves.



Use an assistant.



Place the part on a blanket.



Work perpendicular.



Remove any burrs.



Use touch-up paint and allow to dry.



Tighten to the specified torque.



Apply firm pressure while rolling, especially at the ends, to set the adhesive.



Press firmly.



Clean with isopropyl alcohol.



Return the original part to the client.  
(Do not reuse.)

## Safety: General







- Observe all safety notes and precautions described in the service information, in addition to those described in this Installation Instruction. Be extremely careful for your safety and the safety of others.
- Be careful not to damage the vehicle or the parts.
- The illustrations may differ slightly from the actual accessory.

## Safety: Accessory

Always use the parts and tools specified in the installation instructions.

# PARTS LIST

Splash Guard Kit (P/N 08P00-3S5-200A)




Right front splash guard	Left front splash guard	Right rear splash guard	Left rear splash guard
			
Self-tapping screws (14)	Spring nuts (2)		
			

# REQUIRED TOOLS AND SUPPLIES

- Pushpin
- Phillips screwdriver
- Stubby Phillips screwdriver

# INSTALLATION


1. Turn the steering wheel fully counterclockwise.

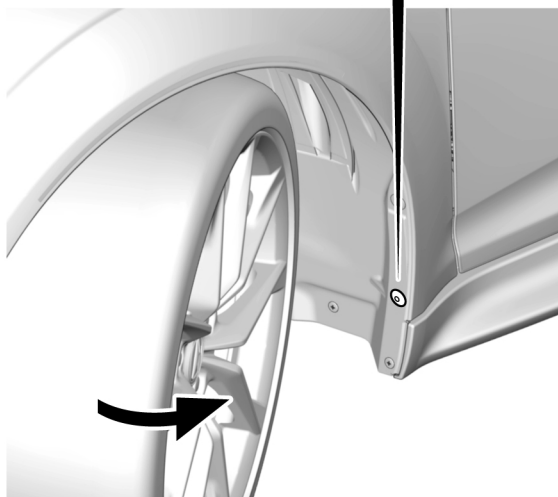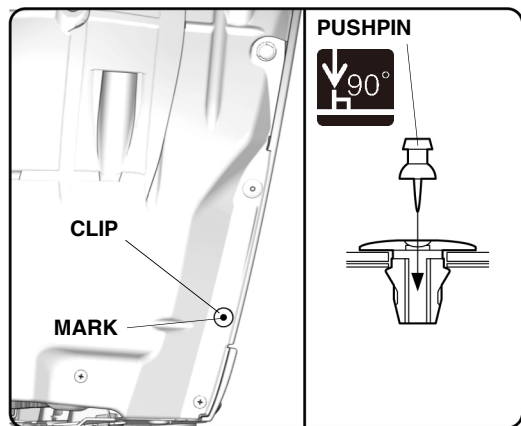

QM80102AU

2. Pierce the clip.

3. Remove the self-tapping screws.

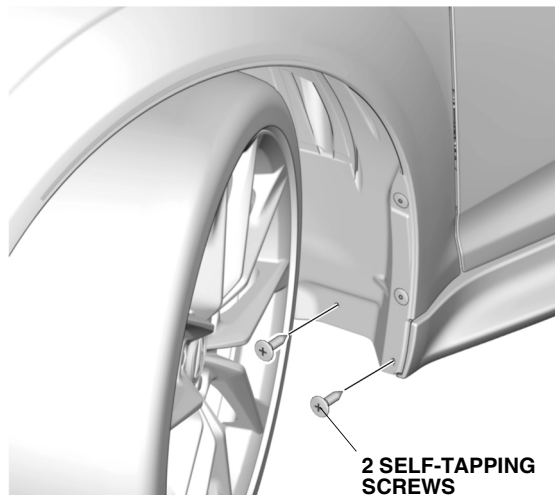


QM80103AU

4. Install the left front splash guard.



**NOTE**

- Install in the order shown.
- Make sure that there is no gap between the splash guard and vehicle body. If there is a gap, loosen the self-tapping screws, hold the splash guard against the vehicle body, and retighten the screws.
- Make sure that the splash guard is properly installed.

**LEFT FRONT INNER FENDER**

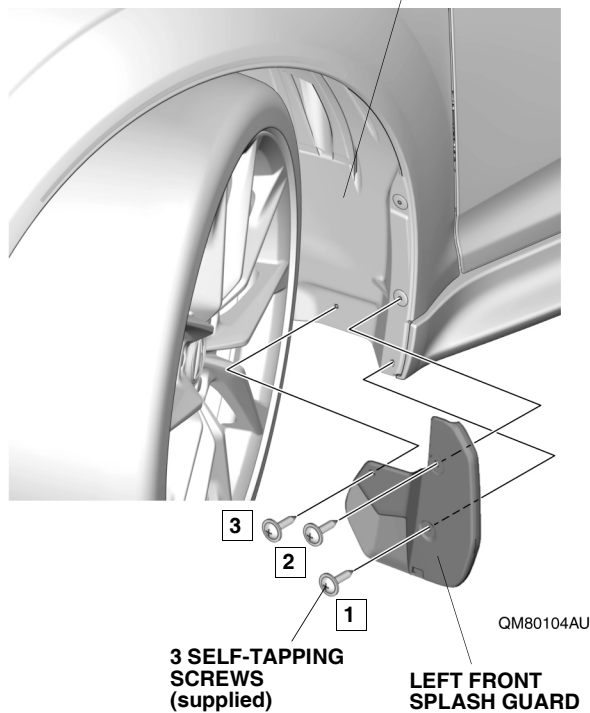

5. Remove the self-tapping screws.

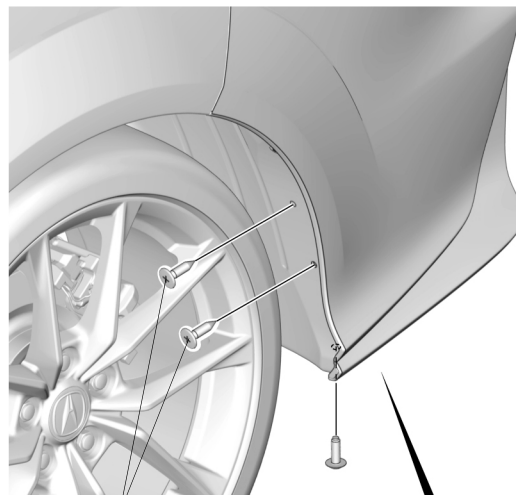


**2 SELF-TAPPING SCREWS**



**SELF-TAPPING SCREW**



Do not remove.




**BOTTOM VIEW**

QM80105BU

6. Install the spring nut.

### NOTICE

Make sure to install the spring nut in the correct orientation.

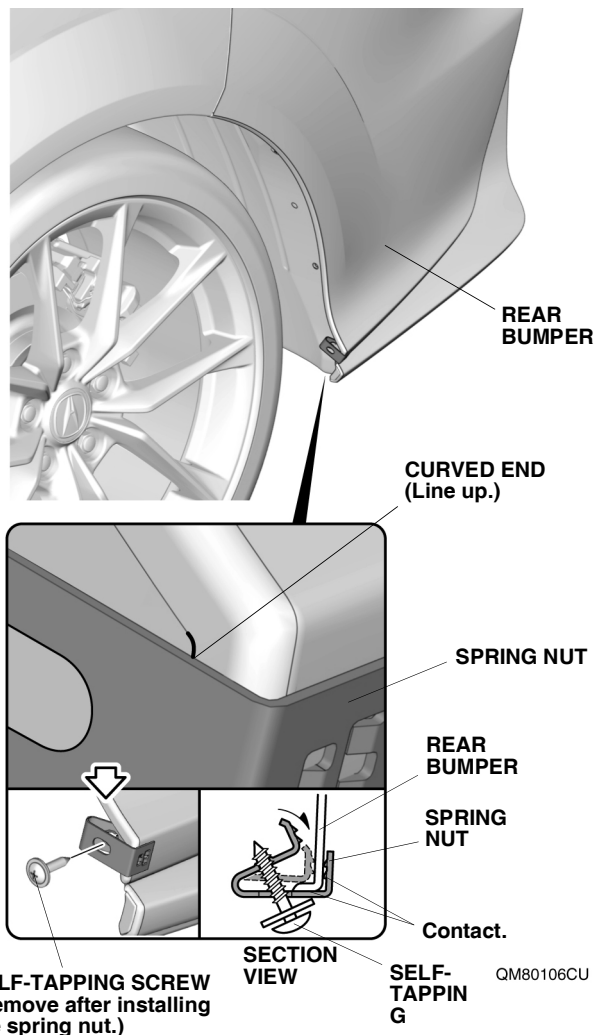


7. Remove the self-tapping screw.


8. Install the left rear splash guard.

### NOTE

- Install in the order shown.
- Make sure that there is no gap between the splash guard and vehicle body. If there is a gap, loosen the self-tapping screws, hold the splash guard against the vehicle body, and re-tighten the screws.
- Make sure that the splash guard is properly installed.

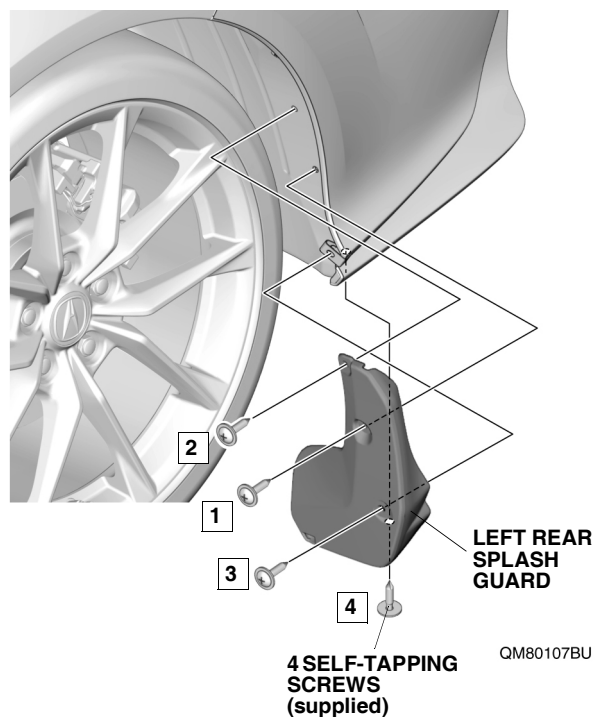

9. Turn the steering wheel fully clockwise, and repeat the same procedures on the other side.

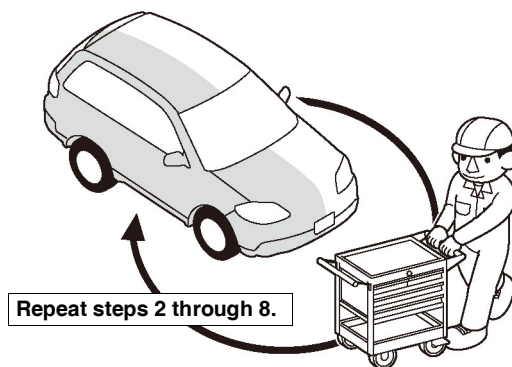

10. Check that all parts are installed properly.